



Bravo

MORE THAN A COMPLIMENT

Up to 18.4 SEER2 Rating



compressor	3 YEARS WARRANTY	parts	3 YEARS WARRANTY
------------	-------------------------------	-------	-------------------------------

**MULTI-POSITION AIR HANDLER
HEAT PUMP SYSTEM**
18K TO 60K BTU



Use your Smart device to control your unit from anywhere with SMART APP!


SINGLE-ZONE MULTI-POSITION AIR HANDLER HEAT PUMP SYSTEM

Cross compatible with any 3rd party 24V unit



The **Bravo** AHU's universal compatibility features a built-in 24V interface that integrates with most third-party outdoor models ranging from 18K to 60K BTU/h, as well as 24V smart thermostats.

This 24V AHU is a perfect replacement choice, particularly for homeowners looking to modernize their system without a complete overhaul of their existing controls.



BRV-WT24V
Smart Wired Thermostat
24V Wall Thermostat included.

Features:


- High-efficiency Inverter Technology for consistent comfort and energy savings
- Uses environmentally friendly R32 refrigerant for improved performance
- 4-position flexible installation
- AHRI and ETL listed
- GoldFin A-Coil
- Compatible with 3rd party Electric heater kits 5, 8, 10, 15, 20 kW
- Compatible with 3rd party 24V Wall Thermostat
- Cross compatible with any 3rd party 24V unit




Indoor Model			BRV-MP18AHUW-230VI	BRV-MP24AHUW-230VI	BRV-MP36AHUW-230VI	BRV-MP48AHUW-230VI	BRV-MP60AHUW-230VI
Power Supply	V-Ph-Hz		208-230-1-60	208-230-1-60	208-230-1-60	208-230-1-60	208-230-1-60
Cooling	Rated Capacity	Btu/h	18,000	24,000	36,000	48,000	53,000
Heating	Rated Capacity	Btu/h	19,000	26,000	36,000	48,000	55,000
Indoor fan motor	Type		ECM	ECM	ECM	ECM	ECM
	Output	W	75	75	150	150	150
Max Fuse	A		6.0	6.0	6.0	10.0	10.0
Indoor Air Flow (High/Low)	CFM		650 / 420	830 / 420	1110 / 520	1690 / 750	1740 / 750
Indoor Noise Level (High/Low)	dB(A)		38.5 / 34	42 / 38	50 / 42.5	53 / 46	53 / 46
Indoor Unit	Dimensions (WxDxH)	in	17.52 × 21.02 × 45.00	17.52 × 21.03 × 45.00	21.03 × 21.03 × 49.22	24.48 × 21.03 × 52.98	24.48 × 21.03 × 52.98
	Packing (WxDxH)	in	20.87 × 26.57 × 46.26	20.86 × 26.58 × 46.27	24.41 × 26.58 × 50.20	27.88 × 26.58 × 54.14	27.88 × 26.58 × 54.14
	Net/Gross Weight	lbs.	84 / 92	84 / 92	132 / 140	152 / 160	152 / 160
Refrigerant Piping	Liquid Side / Gas Side	in	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"
Ambient Temperature Range	Cooling	°F	60-90	60-90	60-90	60-90	60-90
	Heating	°F	60-90	60-90	60-90	60-90	60-90

Outdoor Model			BRV-SD18HI-230VO	BRV-SD24HI-230VO	BRV-SD36HI-230VO	BRV-SD48HI-230VO	BRV-SD60HI-230VO
Power Supply	V-Ph-Hz		208-230-1-60	208-230-1-60	208-230-1-60	208-230-1-60	208-230-1-60
Cooling	Rated Capacity	Btu/h	18,000	24,000	36,000	48,000	53,000
	EER2	Btu/h	11.5	10.4	10.4	9	8
	SEER2	Btu/h	18.4	17.7	17.0	16.5	15.8
Heating	Rated Capacity	Btu/h	19,000	26,000	36,000	48,000	55,000
	HSPF2	Btu/h	8.6	8.5	8.4	8.5	8.5
	COP	W/W	3.85	3.4	3.45	3.45	3.55
Compressor	Type		rotary	rotary	rotary	rotary	rotary
	Rated current(RLA)	A	6.80	9.45	9.45	5.25	5.25
	Cpacity	W	1115	2085	2085	2680	2680
	Rated current	A	6.80	9.45	9.45	5.25	5.25
Outdoor fan motor RLA	A		2.00	2.00	2.50	2.50	2.50
Outdoor Unit	Dimensions (WxDxH)	in	36.03 × 25.59 × 13.58	36.03 × 25.59 × 13.58	37.98 × 31.89 × 15.75	37.98 × 31.89 × 15.75	37.98 × 31.89 × 15.75
	Packing (WxDxH)	in	40.16 × 28.94 × 17.13	40.16 × 28.94 × 17.13	42.13 × 34.64 × 20.67	42.13 × 34.64 × 20.67	42.13 × 34.64 × 20.67
	Net/Gross Weight	lbs.	84 / 92	84 / 92	132 / 140	152 / 160	152 / 160
Refrigerant System	Type		R32	R32	R32	R32	R32
	Charge	oz	56.44	58.2	84.66	105.82	105.82
	Liquid Side / Gas Side	in	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"	3/8" / 3/4"
	Max. Refrigerant Pipe Length	ft	98.4	164	246	246	246
	Max. Different Level	ft	65.6	82	98.4	98.4	98.4
Max Fuse	A		20	25	30	40	50
Outdoor Air Flow	CFM		2000	2000	2650	2950	2950
Outdoor Noise Level (High)	dB(A)		54	55	56	60	60
Ambient Temperature Range	Cooling	°F	5-131	5-131	5-131	5-131	5-131
	Heating	°F	-4-75	-4-75	-4-75	-4-75	-4-75

SINGLE-ZONE MULTI-POSITION AIR HANDLER HEAT PUMP SYSTEM

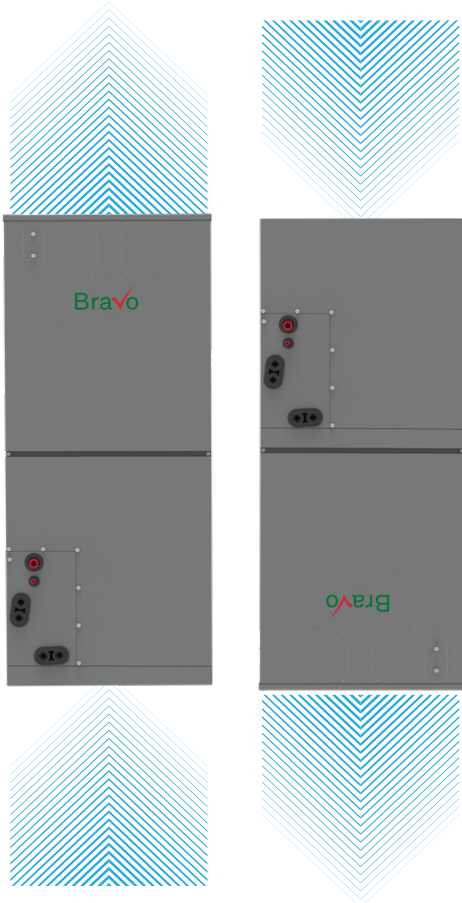

The **24V Multi-position** air handler offers maximum installation flexibility by allowing the unit to be configured in upflow, downflow, or horizontal positions.

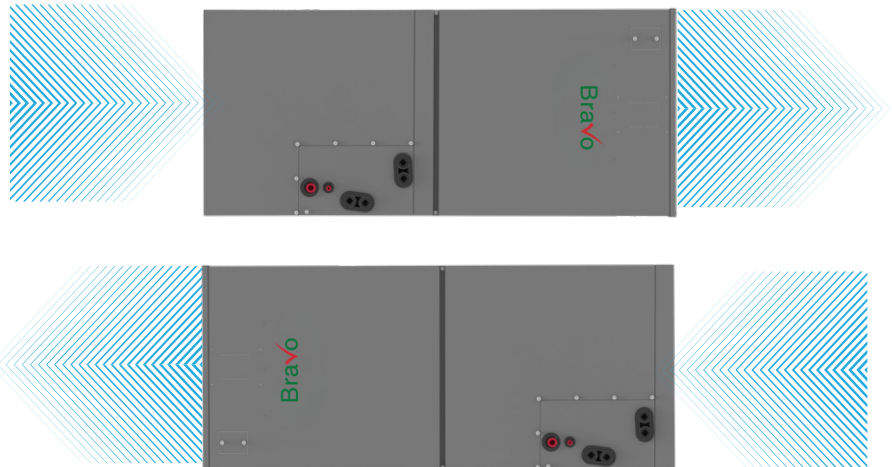

Auxiliary electric heat kits for
backup emergency heating.

AB-EHK05KW

AB-EHK10KW

AB-EHK15KW

AB-EHK20KW

(Sold Separately)

Key Advantages of Multi-Positioning

Versatile Installation

- Fits in basements, attics, or closets.
- Adapts to your specific space limits.

Reduced Inventory Costs

- Dealers stock one unit instead of four.
- Simplifies the equipment ordering process.

Easy Future Conversions

- Adapts easily during home remodeling projects.
- Eliminates the need for new equipment.

Optimized Airflow Direction

- Supports vertical or horizontal ductwork layouts.
- Maximizes heating and cooling efficiency.

Bravo

MORE THAN A COMPLIMENT

acbravo.com

04162026