Bravo

MORE THAN A COMPLIMENT



compressor 7 YEARS WARRANTY

parts 5 YEARS WARRANTY

R32

SMART APP

Bravo's SMART APP allows you to control your units at home through your smart devices from anywhere.



Bravo

MORE THAN A COMPLIMENT





ABOUT THE COMPANY

BRAVO is part of the portfolio of one of the world's leading HVAC manufacturers, renowned for its extensive global presence and commitment to innovation. Now making its mark in the North American market, BRAVO embodies the essence of Italian design while incorporating the latest European trends in comfort and efficiency.

True to its slogan, **"More Than a Compliment,"** BRAVO reflects a commitment to exceeding expectations through superior quality, performance, and reliability.

In the United States, BRAVO is proudly distributed by COMFORTSIDE, LLC, a trusted HVAC distributor with over a decade of experience delivering premium air conditioning solutions to consumers. Discover BRAVO's exceptional lineup of products, thoughtfully designed to provide the perfect balance of style, comfort, and performance.

BRAVO. More Than a Compliment. A Higher Standard of Comfort.

R32 | Intertek | AHRI CERTIFIED® | ENERGY STAR | GoldFin


Bravo



CONTENTS

Bravo MORE THAN A COMPLIMENT ROMA

Single-Zone Wall Mounts 6-7

Bravo MORE THAN A COMPLIMENT PISA

Single-Zone Slim Ducts & Ceiling Cassettes.....8-11

Bravo MORE THAN A COMPLIMENT MILANO

Multi-Zone Wall Mounts, Ceiling Cassettess,
Slim Ducts & Floor Ceilings 12-15


Multi-Zone Combination Chart.....16-17

Bravo

MORE THAN A COMPLIMENT

ROMA

R32

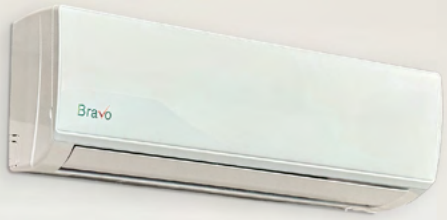

compressor 7 YEARS WARRANTY

parts 5 YEARS WARRANTY

Up to 17.0 SEER2 Rating




SINGLE-ZONE

MINI SPLIT AIR CONDITIONING SYSTEM

12K, 18K, 24K & 36K Btu/h

SMART APP INCLUDED

Use your Smart device to control your unit from anywhere with SMART APP!

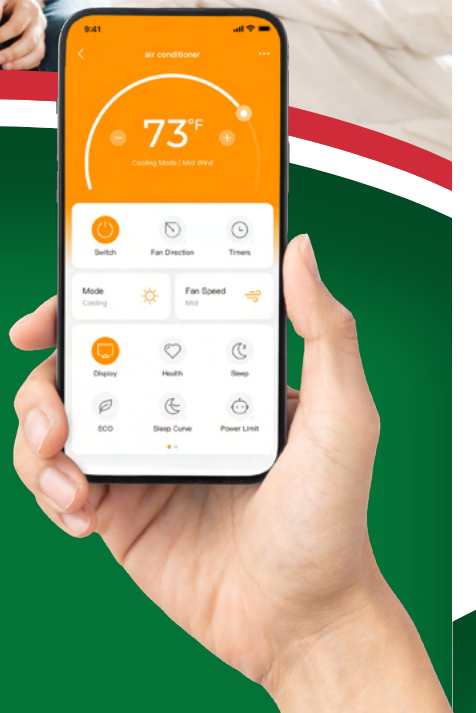

Features:

- Remote Control Included
- Smart App: Connect from anywhere
- Comfortable Sleep Mode
- Super Mode
- Eco Mode
- Multiple Fan Speeds
- Timer
- Louver Auto Swing
- Anti-Mildew Mode
- LED Display

SMART APP INCLUDED



13' Line Sets and Communication Cable included

Bravo
MORE THAN A COMPLIMENT
ROMA

Indoor Model			BRV-R12W-115VI	BRV-R12W-230VI	BRV-R18W-230VI	BRV-R24W-230VI	BRV-R36W-230VI
Outdoor Model			BRV-R12LS-115VO	BRV-R12LS-230VO	BRV-R18LS-230VO	BRV-R24LS-230VO	BRV-R36LS-230VO
Power Supply		V-Ph-Hz	115-1-60	208/230-1-60	208/230-1-60	208/230-1-60	208/230-1-60
Cooling	Rated Capacity	Btu/h	12,000	12,000	17,000	24,000	35,000
	EER2	Btu/h	9.5	9.5	9.5	9.5	9.5
	SEER2	Btu/h	17	17	17	17	17
Heating	Rated Capacity	Btu/h	12,000	12,000	17,000	24,000	34,500
	HSPF2-4	Btu/h	9.0	9.0	10.5	8.64	8.5
	COP2	W/W	3.5	3.2	3.5	3.5	3.2
Minimum Circuit Ampacity		A	17	11	13	13	23
Max Fuse		A	25	15	20	20	35
Indoor Air Flow (Turbo/Hi/Mi/Lo/Mute)		CFM	276/265/241/224/206	294/264/235/206/159	412/364/294/235/208	676/629/505/412/352	882/741/564/458/411
Indoor Noise Level (Turbo/Hi/Mi/Lo/Mute)		dB(A)	42.9/40/36.1/33/29	45/42/39/35/33	49/45/43/40/37	47/45/39/34/32	55/52/46/41/39
Indoor Unit	Dimensions (WxDxH)	in	30.59x7.91x9.84	30.59x7.91x9.84	35.82×8.11x11.57	39.76x8.66x12.40	46.88x10.15x14.17
	Packing (WxDxH)	in	33.07x12.4x10.23	33.07×12.40×10.23	38.54×14.64×10.90	43.15x15.35x11.81	49.60x16.92x12.91
	Net Weight	lbs	16.5	16.5	20.9	26.5	38.6
Outdoor Air Flow		CFM	276/265/241/224/206	294/264/235/206/159	412/364/294/235/208	676/629/505/412/352	882/741/564/458/411
Outdoor Side Noise Level		dB(A)	53	55	57	55	63
Outdoor Unit	Dimensions (WxDxH)	in	30.59x11.42x19.61	30.59x11.41x19.61	31.88×12.00×21.61	30.70x13.74x23.81	38.50x16.57x31.61
	Packing (WxDxH)	in	32.99x13.30x21.25	32.99x13.30x21.25	33.54x14.09x24.02	35.43x15.94x25.39	40.23x18.89x32.87
	Gross Weight	lbs.	54.01	52.91	61.73	74.96	105.8
Refrigerant Type		oz	R32	R32	R32	R32	R32
Refrigerant Precharge		ft	25	25	25	25	25
Design Pressure		PSIG	725.18	725.18	725.18	725.18	725.18
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	1/4" / 5/8'
	Max Refrigerant Pipe Length	ft	50	50	50	65	65
Connection Wiring		Size x Core Number	4×16AWG	4×16AWG	4×16AWG	4×16AWG	4×16AWG
Ambient Temperature	Indoor (Cooling/Heating)	°F	>=62/<=86	>=62/<=86	>=62/<=86	>=62/<=86	>=62/<=86
	Outdoor (Cooling/Heating)	°F	5~122/-4~86	5~122/-4~86	5~122/-4~86	5~122/-4~86	5~122/-4~86

R32 | Intertek | AHRI CERTIFIED | GoldFin

Bravo
MORE THAN A COMPLIMENT
PISA

R32

compressor 7 YEARS WARRANTY
parts 5 YEARS WARRANTY

Up to 20.0 SEER2 Rating




SINGLE-ZONE

CEILING CASSETTE MINI SPLIT SYSTEM


9K, 12K, 18K & 24K Btu/h

SMART APP INCLUDED

Use your Smart device to control your unit from anywhere with SMART APP!

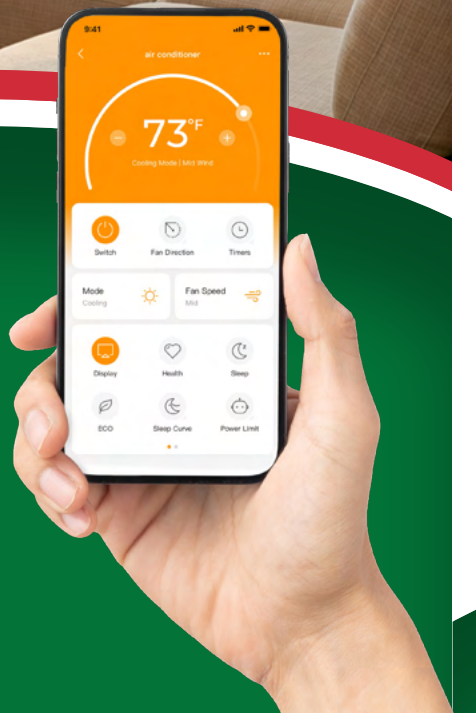



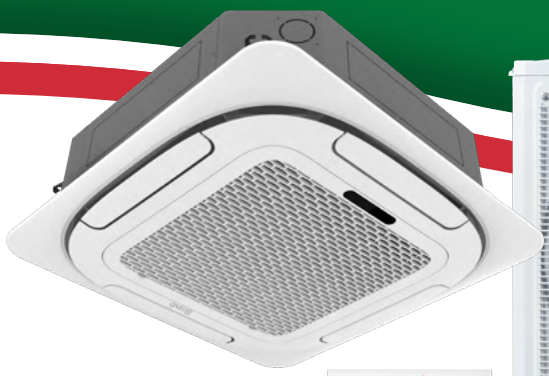



BRV-PNL09-18CT
25.59×25.59×1.18 in.
Panel Net Weight: 6.0 lb

BRV-PNL24CT
37.4×37.4×1.3 in.
Panel Net Weight: 13.2 lb

SMART APP INCLUDED



Wall Thermostat included with Slim Duct Unit

16' Line Sets and Drain Lines, 21' Communication Cable Included

Bravo
MORE THAN A COMPLIMENT
PISA

Indoor Model			BRV-P09CT-230VI	BRV-P12CT-230VI	BRV-P18CT-230VI	BRV-P24CT-230VI
Panel Model			BRV-PNL09-18CT	BRV-PNL09-18CT	BRV-PNL09-18CT	BRV-P24CT-230VI
Outdoor Model			BRV-P09LS-230VO	BRV-P12LS-230VO	BRV-P18LS-230VO	BRV-P24LS-230VO
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity	Btu/h	9,000	12,000	18,000	24,000
	EER2	Btu/h	11.0	9.5	9.5	9.5
	SEER2	Btu/h	20.0	20.0	20.0	20.0
Heating	Rated Capacity	Btu/h	9,000	12,000	18,500	24,000
	HSPF2-4	Btu/h	9.5	9.5	9.5	9.5
	COP2	W/W	3.8	3.5	2.9	3.5
Minimum Circuit Ampacity		A	10	11	12	17
Max Fuse		A	15	15	20	25
Indoor Air Flow (Turbo/Hi/Mi/Lo/Mute)		CFM	329/300/270/217/194	360/320/260/200/190	441/394/335/282/253	836/765/630/530/482
Indoor Noise Level (Turbo/Hi/Mi/Lo/Mute)		dB(A)	43/41/37/33/32	45/43/39/35/32	48/46/42/39/37	51/48/44/40/37
Indoor Unit	Dimensions (WxDxH)	in	22.44×22.44×10.24	22.44×22.44×10.24	22.44×22.44×10.24	32.99×32.99×10
	Packing (WxDxH)	in	28.27×25.87×11.85	28.27×25.87×11.8	28.27×25.87×11.85	36.81×36.81×11.42
	Net/Gross Weight	lbs	31.9 / 38.6	31.9 / 38.6	31.9 / 38.6	51.8 / 59.5
Outdoor Side Noise Level		dB(A)	53	55	55	60
Outdoor Unit	Dimensions (WxDxH)	in	30.98×11.42×19.61	31.5×12.01×21.69	33.54×13.74×23.7	36.1×14.76×27.56
	Packing (WxDxH)	in	32.2×12.8×20.28	32.87×13.39×23.03	35.04×15.16×24.72	37.4×16.54×28.82
	Net/Gross Weight	lbs.	50.7 / 57.3	51.8 / 58.4	66.8 / 74.5	88.2 / 97.0
Refrigerant Type / Pre-charge		oz	R32 / 21.16	R32 / 20.46	R32 / 37.74	R32 / 42.33
Refrigerant Precharge Length		ft	25	25	25	25
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"
	Max Refrigerant Pipe Length	ft	49	49	65	65
Max Height Diff Between Indoor and Outdoor		ft	33	33	49	49
Ambient Temperature Range	Cooling Indoor	°F	62~89	62~89	62~89	62~89
	Cooling Outdoor		5~127	5~127	5~127	5~127
	Heating Indoor		32~86	32~86	32~86	32~86
	Heating Outdo		-4~75	-4~75	-4~75	-4~75

R32 · ETL Intertek · AHRI CERTIFIED · GoldFin

Bravo
MORE THAN A COMPLIMENT
PISA

R32

compressor 7 YEARS WARRANTY
parts 5 YEARS WARRANTY

Up to 20.0 SEER2 Rating


SINGLE-ZONE


SLIM DUCT MINI SPLIT SYSTEM

9K, 12K, 18K & 24K Btu/h

SMART APP INCLUDED

Use your Smart device to control your unit from anywhere with SMART APP!

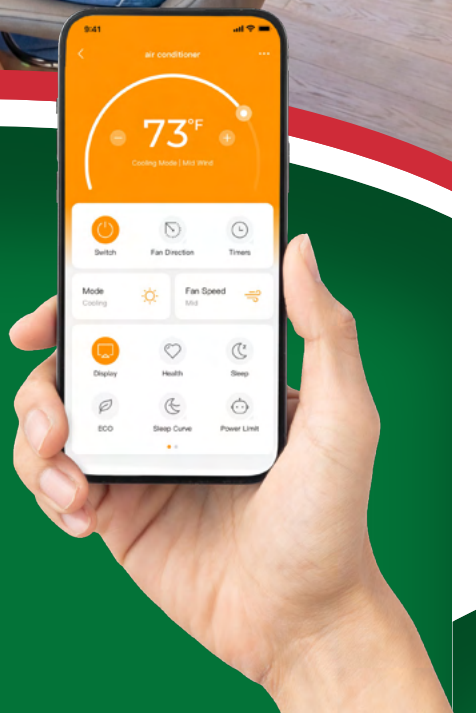

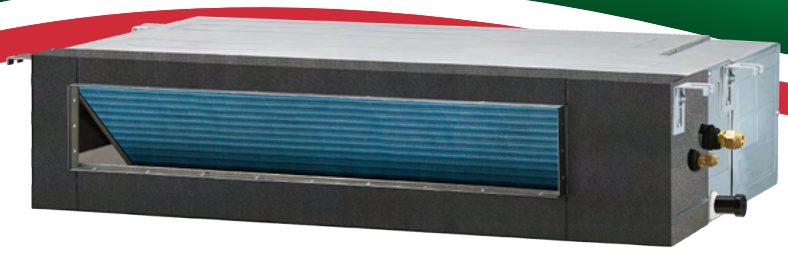



Wall Thermostat included with Slim Duct Unit

SMART APP INCLUDED



Bravo
MORE THAN A COMPLIMENT
PISA

16' Line Sets and Drain Lines, 21' Communication Cable Included

Indoor Model			BRV-P09DT-230VI	BRV-P12DT230VI	BRV-P18DT230VI	BRV-P24DT230VI
Outdoor Model			BRV-P09LS-230VO	BRV-P12LS-230VO	BRV-P18LS-230VO	BRV-P24LS-230VO
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity	Btu/h	9,000	12,000	18,000	24,000
	EER2	Btu/h	11.0	9.5	9.5	9.5
	SEER2	Btu/h	20.0	20.0	20.0	20.0
Heating	Rated Capacity	Btu/h	10,000	12,000	18,500	24,000
	HSPF2-4	Btu/h	9.5	9.5	9.5	9.5
	COP2	W/W	3.8	3.5	2.9	3.5
Minimum Circuit Ampacity		A	10	11	12	17
Max Fuse		A	15	15	20	25
Indoor Air Flow (Turbo/Hi/Mi/Lo/Mute)		CFM	335/305/276/182/182	360/330/270/217/194	500/426/370/300/283	741/623/558/529/470
Indoor Noise Level (Turbo/Hi/Mi/Lo/Mute)		dB(A)	42/39/34/28/28	42/39/34/28/28	48/44/41/36/33	51/49/46/39/34
Indoor Unit	Dimensions (WxDxH)	in	27.56×17.8×7.87	27.56×17.8×7.87	36.22×17.8×7.87	43.31×17.8×7.87
	Packing (WxDxH)	in	35.43×21.85×9.84	35.43×21.85×9.84	44.09×21.85×9.84	50.79×22.24×9.65
	Net/Gross Weight	lbs	33.1 / 39.7	33.1 / 39.7	33.1 / 39.7	50.7 / 58.4
Outdoor Side Noise Level		dB(A)	53	55	55	60
Outdoor Unit	Dimensions (WxDxH)	in	30.98×11.42×19.61	31.5×12.01×21.69	33.54×13.74×23.7	36.1×14.76×27.56
	Packing (WxDxH)	in	32.2×12.8×20.28	32.87×13.39×23.03	35.04×15.16×24.72	37.4×16.54×28.82
	Net/Gross Weight	lbs.	50.7 / 57.3	51.8 / 58.4	66.8 / 74.5	88.2 / 97.0
Refrigerant Type / Pre-charge		oz	R32 / 21.16	R32 / 20.46	R32 / 37.74	R32 / 42.33
Refrigerant Precharge Length		ft	25	25	25	25
Additional refrigerant charge >25ft.		oz /ft	0.11	0.11	0.11	0.11
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"
	Max Refrigerant Pipe Length	ft	49	49	65	65
Max Height Diff Between Indoor and Outdoor		ft	33	33	49	49
Ambient Temperature Range	Cooling Indoor	°F	62~89	62~89	62~89	62~89
	Cooling Outdoor		5~127	5~127	5~127	5~127
	Heating Indoor		32~86	32~86	32~86	32~86
	Heating Outdo		-4~75	-4~75	-4~75	-4~75

R32 · Intertek · AHRI CERTIFIED · GoldFin

Bravo
MORE THAN A COMPLIMENT
MILANO

R32

Multi-Zone Solutions for
up to 5 Zones



MULTI-ZONE
MINI SPLIT AIR CONDITIONING SYSTEM

SMART APP INCLUDED

Use your Smart device to control your unit from anywhere with SMART APP!


Outdoor Unit:

Outdoor Model			BRV-M18-230VO	BRV-M24-230VO	BRV-M30-230VO	BRV-M36-230VO	BRV-M42-230VO
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity (Min - Max)	Btu/h	17,700 (3,800-19,800)	24,000 (4,900-31,400)	30,000 (6,000-38,200)	36,000 (6,350~38,500)	42,000 (8,350-46,000)
	EER2	Btu/h	12.3	12.5	12.5	12.3	12.5
	SEER2	Btu/h	22	23	23	23	24
Heating	Rated Capacity (Min - Max)	Btu/h	18,000 (4,200-22,000)	24,000 (5,200-32,000)	30,000 (6,300-36,000)	36,000 (7,000~43,000)	42,000 (8,450-53,t000)
	HSPF2-4	Btu/h	10	10	10	10	10.5
	COP2	W/W	3.8	4.0	3.9	4.0	3.9
Minimum Circuit Ampacity		A	20	30	40	45	45
Max Fuse		A	20	30	40	45	45
Outdoor Air Flow		CFM	1529	2235	2353	2353	4235
Outdoor Side Noise Level		dB(A)	54	57	58	59	60
Outdoor Unit	Dimensions (WxDxH)	in	34.65x13.90x21.93	38.58x15.28x27.56	41.18x17.91x31.81	41.18x17.91x31.81	39.80x15.75x51.97
	Packing (WxDxH)	in	35.55x15.04x24.21	39.96x16.73x30.00	43.50x19.49x34.84	43.50x19.49x34.84	42.52x16.93x56.69
	Net Weight	lbs.	75.0/80.5	102.5/109.1	148.8/157.6	154.3/163.1	205.0/224.9
Refrigerant Type / Volume		oz	R32/38.8	R32/51.2	R32/67.0	R32/81.2	R32/ 105.8
Refrigerant Precharge		ft	24.6	24.6	24.6	24.6	24.6
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"
	Max Refrigerant Pipe Length (Indoor/Total)	ft	82 / 131	98 / 197	115 / 263	115 / 263	115 / 263
Ambient Temperature	Outdoor (Cooling)	°F	-13~ 125.6	-13~ 125.6	-13~ 125.6	-13~ 125.6	-13~ 125.6
	Outdoor (Heating)	°F	-13~ 75.2	-13~ 75.2	-13~ 75.2	-13~ 75.2	-13~ 75.2

◊ Adapters for 1/4" / 1/2" and 1/4" / 5/8" included in box.



Up to 24.0 SEER2 Rating

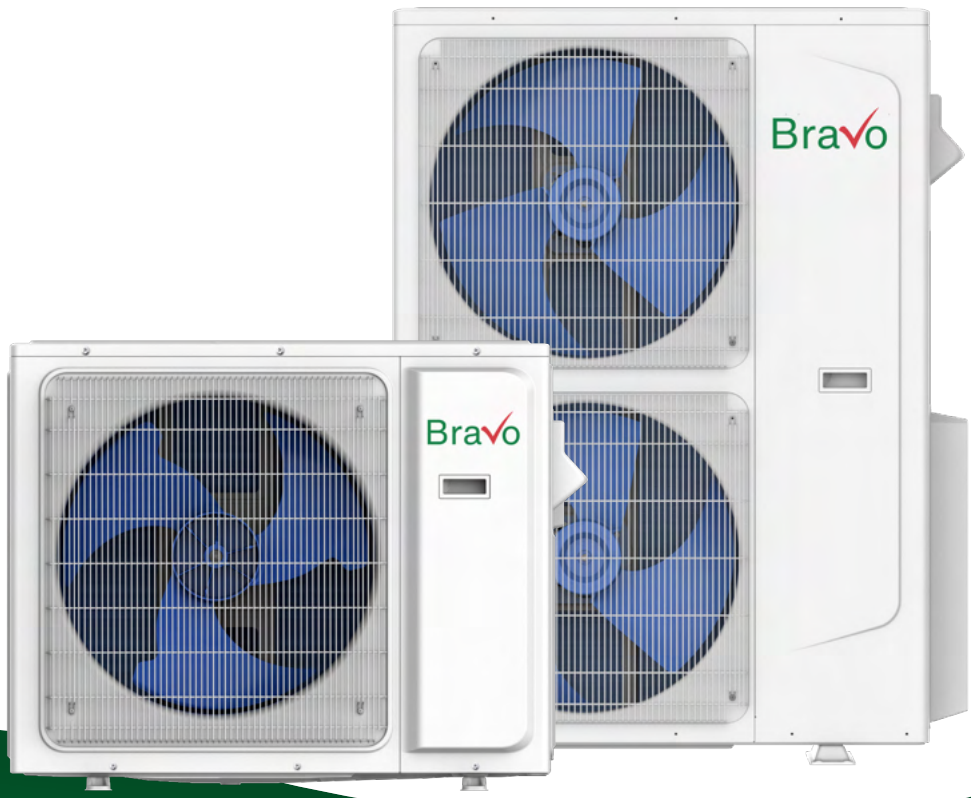

Wall Mounted:



Indoor Model			BRV-M07WM-230VI	BRV-M09WM-230VI	BRV-M12WM-230VI	BRV-M18WM-230VI	BRV-M24WM-230VI
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity	Btu/h	7,000	9,000	12,000	17,000	24,000
Heating	Rated Capacity	Btu/h	7,000	9,000	12,300	17,700	24,000
Max Fuse		A	5	5	5	5	5
Indoor Air Flow		CFM	353	353	353	618	765
Indoor Noise Level		dB(A)	40	40	42	49	50
Indoor Unit	Dimensions (WxDxH)	in	31.02x7.80x11.50	31.02x7.80x11.50	34.49x7.64x11.73	38.82x8.86x12.40	44.13x9.09x12.95
	Packing (WxDxH)	in	34.65x14.57x11.42	34.65x14.57x11.42	37.99x14.57x11.1	42.13x15.16x12.28	47.64x15.75x12.87
	Net/Gross Weight	lbs.	17.60/22.00	17.60/22.00	19.80/24.27	26.45/32.26	33.07/39.68
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 3/8"	◊ 1/4" / 1/2"	◊ 1/4" / 5/8"
Operation Temperature Range		°F	60.8~89.6	60.8~89.6	60.8~89.6	60.8~89.6	60.8~89.6

◊ Adapters for 1/4"/ 1/2" and 1/4"/ 5/8" included in Outdoor Unit box.

Ceiling Cassette:



Indoor Model			BRV-M09CT-230VI	BRV-M12CT-230VI	BRV-M18CT-230VI	BRV-M24CT-230VI
Panel Model Number			BRV-PN9-18CT	BRV-PN9-18CT	BRV-PN9-18CT	BRV-PN24CT
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity	Btu/h	9,000	12,000	18,000	24,000
Heating	Rated Capacity	Btu/h	10,000	12,000	18,500	24,000
Max Fuse		A	5	5	5	5
Indoor Air Flow		CFM	383	383	442	824
Indoor Noise Level		dB(A)	40	40	45	47
Indoor Unit	Dimensions (WxDxH)	in	22.44x22.44x10.24	22.44x22.44x10.24	22.44x22.44x10.24	33.07x33.07x9.69
	Packing (WxDxH)	in	28.35x25.59x11.42	28.35x25.59x11.42	28.35x25.59x11.42	35.83x35.83x12.20
	Net Weight	lbs.	30.9/37.5	30.9/37.5	33.1/38.6	52.9/61.7
Panel	Dimensions (WxDxH)	in	25.59x25.59x2.17	25.59x25.59x2.17	25.59x25.59x2.17	37.40x37.40x2.17
	Packing (WxDxH)	in	27.95x27.95x3.15	27.95x27.95x3.15	27.95x27.95x3.15	39.37x39.37x3.94
	Net/Gross Weight	lbs.	4.9/8.2	4.9/8.2	4.9/8.2	11.7/17.2
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	◊ 1/4" / 1/2"	◊ 1/4" / 5/8"
Operation Temperature Range		°F	60.8~89.6	60.8~89.6	60.8~89.6	60.8~89.6

◊ Adapters for 1/4"/ 1/2" and 1/4"/ 5/8" included in Outdoor Unit box.

Ceiling Cassette Panel:



BRV-PN9-18CT

Panel Dimension:
25.59×25.59×2.17 in.
Panel Net Weight: 4.9 lb.



BRV-PN24CT

Panel Dimension:
37.40×37.40×2.17 in.
Panel Net Weight: 11.7 lb.

Slim Duct:



Indoor Model			BRV-M09DT-230VI	BRV-M12DT-230VI	BRV-M18DT-230VI	BRV-M24DT-230VI
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity	Btu/h	9,000	12,000	18,000	24,000
Heating	Rated Capacity	Btu/h	10,000	12,000	19,000	24,600
Max Fuse		A	5	5	5	5
Indoor Air Flow		CFM	353	353	530	795
Indoor Noise Level		dB(A)	34	34	39	42
Indoor Unit	Dimensions (WxDxH)	in	27.56x17.72x7.8	27.56x17.72x7.8	27.56x27.56x9.65	39.37x27.56x9.65
	Packing (WxDxH)	in	34.25x21.3x10.24	34.25x21.3x10.24	36.61x32.68x11.81	48.43x32.68x11.81
	Net/Gross Weight	lbs.	27.6/33.1	27.6/33.1	47.4/56.2	59.5/70.5
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	◊ 1/4" / 1/2"	◊ 1/4" / 5/8"
Operation Temperature Range		°F	60.8~89.6	60.8~89.6	60.8~89.6	60.8~89.6

◊ Adapters for 1/4"/ 1/2" and 1/4"/ 5/8" included in Outdoor Unit box.



Floor Ceiling:



Indoor Model			BRV-M09FC-230VI	BRV-M12FC-230VI	BRV-M18FC-230VI	BRV-M24FC-230VI
Power Supply		V-Ph-Hz	208~230-1-60	208~230-1-60	208~230-1-60	208~230-1-60
Cooling	Rated Capacity	Btu/h	9,000	12,000	18,000	24,000
Heating	Rated Capacity	Btu/h	11,000	12,000	18,000	24,000
Max Fuse		A	5	5	5	5
Indoor Air Flow		CFM	500	500	530	824
Indoor Noise Level		dB(A)	39	39	41	44
Indoor Unit	Dimensions (WxDxH)	in	39.37×27.17×9.25	39.37×27.17×9.25	39.37×27.17×9.25	50.39×27.17×9.25
	Packing (WxDxH)	in	42.52×30.32×12.80	42.52×30.32×12.80	42.52×30.32×12.80	53.54×30.32×12.80
	Net/Gross Weight	lbs.	57.3/67.2	57.3/67.2	59.5/69.5	71.7/83.8
Refrigerant Piping	Liquid Side / Gas Side	in	1/4" / 3/8"	1/4" / 3/8"	1/4" / 1/2"	1/4" / 5/8"
Operation Temperature Range		°F	60.8~89.6	60.8~89.6	60.8~89.6	60.8~89.6

◊ Adapters for 1/4"/ 1/2" and 1/4"/ 5/8" included in Outdoor Unit box.

Combination Chart:

Btu/h	Wall Mounted	Duct	Ceiling Cassette	Ceiling Cassette
				
7K	BRV-M07WM-230VI			
9K	BRV-M09WM-230VI	BRV-M09DT-230VI	BRV-M09CT-230VI	BRV-M09FC-230VI
12K	BRV-M12WM-230VI	BRV-M12DT-230VI	BRV-M12CT-230VI	BRV-M12FC-230VI
18K	BRV-M18WM-230VI	BRV-M18DT-230VI	BRV-M18CT-230VI	BRV-M18FC-230VI
24K	BRV-M24WM-230VI	BRV-M24DT-230VI	BRV-M24CT-230VI	BRV-M24FC-230VI

			Cooling					Heating						Refrigerant	Refrigerant Piping						Ambient Temperature	
Model Name	Min. Circuit Ampacity (MCA)	Max. Fuse Size	Capacity (range)	Input	Rated current	SEER2	EER2	Capacity (range)	Input	Rated current	COP	HSPF	Noise Level	Type	Liquid side	Gas side	Max. length for all rooms	Max. length for one indoor unit	Max. height elevation between indoor and outdoor	Max. height elevation between indoor units	Cooling	Heating
	A	A	Btu/h	W	A			Btu/h	W	A			db (A)		inch	inch	ft	ft	ft	ft	°F	°F
BRV-M18-230VO	15	20	17,700(3,800-19,800)	1440	6.39	22	3.60	18,000(4,200-22,000)	1390	6.17	3.8	10	54	R32	2x1/4"	2x3/8"	131	82	49	33	-13~125.6	-13~75.2
BRV-M24-230VO	20	30	24,000(4,900-31,400)	1920	8.52	23	3.66	24,000(5,200-32,000)	1760	7.76	4.0	10	57	R32	3x1/4"	3x3/8"	197	98	49	33	-13~125.6	-13~75.2
BRV-M30-230VO	26	40	30,000(6,000-38,200)	2400	10.65	23	3.66	30,00(6,300-36,000)	2250	9.98	3.9	10	58	R32	4x1/4"	4x3/8"	263	115	49	33	-13~125.6	-13~75.2
BRV-M36-230VO	29	45	36,000(6,350~38,500)	2930	12.87	23	3.60	36,000(7,000~43,000)	2640	11.59	4.0	10	59	R32	4x1/4"	4x3/8"	263	115	49	33	-13~125.6	-13~75.2
BRV-M42-230VO	32	45	42,000 (8,350-46,000)	3360	14.92	24	3.66	42,000 (8,450-53,000)	3160	14.00	3.9	10.5	60	R32	4x1/4"	4x3/8"	263	115	49	33	-13~125.6	-13~75.2

UP TO 2 ZONES




BRV-M18-230VO

2 ZONES	
9K	9K
9K	12K
12K	12K

Note: 7K Wall Mount may be substituted for a 9K unit anywhere in this chart.

UP TO 3 ZONES



BRV-M24-230VO

2 ZONES	
9K	9K
9K	12K
9K	18K
12K	12K
12K	18K
18K	18K

3 ZONES		
9K	9K	9K
9K	9K	12K
9K	9K	18K
9K	12K	12K
12K	12K	12K

Note: 7K Wall Mount may be substituted for a 9K unit anywhere in this chart.

UP TO 4 ZONES



BRV-M30-230VO

2 ZONES	
9K	9K
9K	12K
9K	18K
9K	24K
12K	12K
12K	18K
12K	24K
18K	18K
18K	24K

3 ZONES		
9K	9K	9K
9K	9K	12K
9K	9K	18K
9K	9K	24K
9K	12K	12K
9K	12K	18K
9K	12K	24K
12K	12K	12K
12K	12K	18K

4 ZONES			
9K	9K	9K	9K
9K	9K	9K	12K
9K	9K	9K	18K
9K	9K	12K	12K

Note: 7K Wall Mount may be substituted for a 9K unit anywhere in this chart.

R32

UP TO 4 ZONES



BRV-M36-230VO

2 ZONES	
9K	9K
9K	12K
9K	18K
9K	24K
12K	12K
12K	18K
12K	24K
18K	18K
18K	24K
24K	24K

3 ZONES		
9K	9K	9K
9K	9K	12K
9K	9K	18K
9K	9K	24K
9K	12K	12K
9K	12K	18K
9K	12K	24K
9K	18K	18K
9K	18K	24K
12K	12K	12K
12K	12K	18K
12K	12K	24K
12K	18K	18K
12K	18K	24K
18K	18K	18K

4 ZONES			
9K	9K	9K	9K
9K	9K	9K	12K
9K	9K	9K	18K
9K	9K	9K	24K
9K	9K	12K	12K
9K	9K	12K	18K
9K	9K	12K	24K
9K	9K	18K	18K
9K	12K	12K	12K
9K	12K	12K	18K
12K	12K	12K	12K
12K	12K	12K	18K

Note: 7K Wall Mount may be substituted for a 9K unit anywhere in this chart.

UP TO 5 ZONES



BRV-M42-230VO

2 ZONES	
9K	9K
9K	12K
9K	18K
9K	24K
12K	12K
12K	18K
12K	24K
18K	18K
18K	24K
24K	24K

3 ZONES		
9K	9K	9K
9K	9K	12K
9K	9K	18K
9K	9K	24K
9K	12K	12K
9K	12K	18K
9K	12K	24K
12K	12K	12K
12K	12K	18K
12K	12K	24K
12K	18K	18K
12K	18K	24K
18K	18K	18K
18K	18K	24K

4 ZONES			
9K	9K	9K	9K
9K	9K	9K	12K
9K	9K	9K	18K
9K	9K	9K	24K
9K	9K	12K	12K
9K	9K	12K	18K
9K	9K	12K	24K
9K	9K	18K	18K
9K	9K	18K	24K
9K	12K	12K	12K
9K	12K	12K	18K
9K	12K	12K	24K
9K	12K	18K	18K
9K	12K	18K	24K
9K	18K	18K	18K
12K	12K	12K	12K
12K	12K	12K	18K
12K	12K	12K	24K
12K	12K	18K	18K

5 ZONES				
9K	9K	9K	9K	9K
9K	9K	9K	9K	12K
9K	9K	9K	9K	18K
9K	9K	9K	9K	24K
9K	9K	9K	12K	12K
9K	9K	9K	12K	18K
9K	9K	9K	12K	24K
9K	9K	9K	18K	18K
9K	9K	12K	12K	12K
9K	9K	12K	12K	18K
9K	12K	12K	12K	12K
9K	12K	12K	12K	18K
12K	12K	12K	12K	12K


Note: 7K Wall Mount may be substituted for a 9K unit anywhere in this chart.



- Remote Control Included for all unit.
- Wall Thermostat Included except for Wall Units.

DOWNLOAD THE BRAVO REMOTE APP

Scan the following intelligent QR code to download SMART APP for iOS or Android

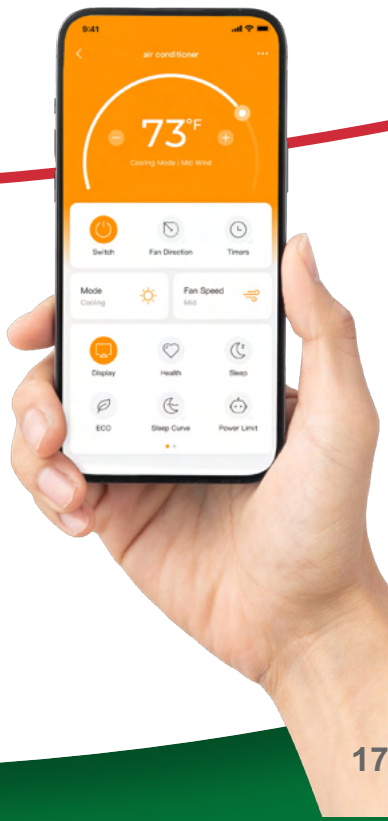

BRAVO, a brand that brings together European-inspired design, advanced technology, and dependable performance. Backed by one of the world's largest HVAC manufacturers, BRAVO delivers efficient comfort solutions tailored for the North American market. Its promise, **"More Than a Compliment,"** reflects a commitment to superior quality that goes beyond expectations. Exclusively distributed in tyhe United States by COMFORTSIDE LLC, BRAVO offers homeowners and professionals a compelling blend of elegance, innovation, and value.

Bravo

MORE THAN A COMPLIMENT

11/2026