

SUBMITTAL DATA SHEET

Series Name: DC Inverter Heat Pump AHU Series
Model Number: BRV-MP36AHUW-230VI + BRV-SD36HI-230VO

Air Handler Heat Pump System	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION	
Indoor Air Flow (High/Low) (CFM)	1110/520
Indoor Noise Level (High/Low) (dBA)	50/42.5
Dimension (WxDxH)	inch 21-1/32x21-1/32x49-7/32
	mm 534x534x1245
Package (WxDxH)	inch 24-13/32x26-37/64x50-13/64
	mm 620x675x1275
Net/Gross Weight	lbs 137/151
	kg 62/68.5

OUTDOOR SPECIFICATION	
Compressor Type	TWIN-ROTARY
Compressor Model	KTM240D57UMT
Refrigerant	R32
Refrigerant Oil Charge(mL)	670
Refrigerant Oil	VG74
Outdoor Air Flow (Max) (CFM)	2650.0
Outdoor Noise Level (dBA)	56
Dimension (WxDxH)	inch 37-63/64x31-57/64x15-3/4
	mm 965x810x400
Package (WxDxH)	inch 42-1/8x34-41/64x20-43/64
	mm 1070x880x525
Net/Gross Weight	lbs 132/140
	kg 60/63.5


EFFICIENCY			
Cooling		Heating	
SEER2	17.0	HSPF2	8.4
EER2	10.4	COP	3.45

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	36000
Min/Max Capacity	8300~38900
Standard Operating Range(°F/°C)	5~131(-15~55)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	36000
2. @ 47°F Min/Max Capacity	6700~41300
3. @ 17°F Rated	22600
4. @ 5°F Rated: Capacity	27000
Standard Operating Range(°F/°C)	-4~75(-20~24)
1. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Rated Heating Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Heating Conditions, Compressor Operating at Max. Frequency	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB



ELECTRICAL	
Indoor Power Supply	208/230V,60Hz,1Ph
Indoor MCA 115V/(208/230V)	5
Indoor MOP	6
Outdoor Power Supply	208/230V,60Hz,1Ph
Outdoor MCA	25
Outdoor MOP	30
Communication Wiring	AWG 25x3 Shielded
Compressor RLA	9.45
Outdoor Fan Motor RLA	2.5
Outdoor Fan Motor W	150
Indoor Fan Motor RLA	3.6
Indoor Fan Motor W	375
System Power Input @ Cooling (W)	3462(710 ~ 4500)
System Power Input @ Heating (W)	3050(460 ~3550)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Throttle type(Indoor)	Piston
Throttle type(Outdoor)	Capillary
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246(75)
Max. Height Difference(ft/m)	98.4(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	84.66(2.4)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.52(48)
Connection Method	Flared

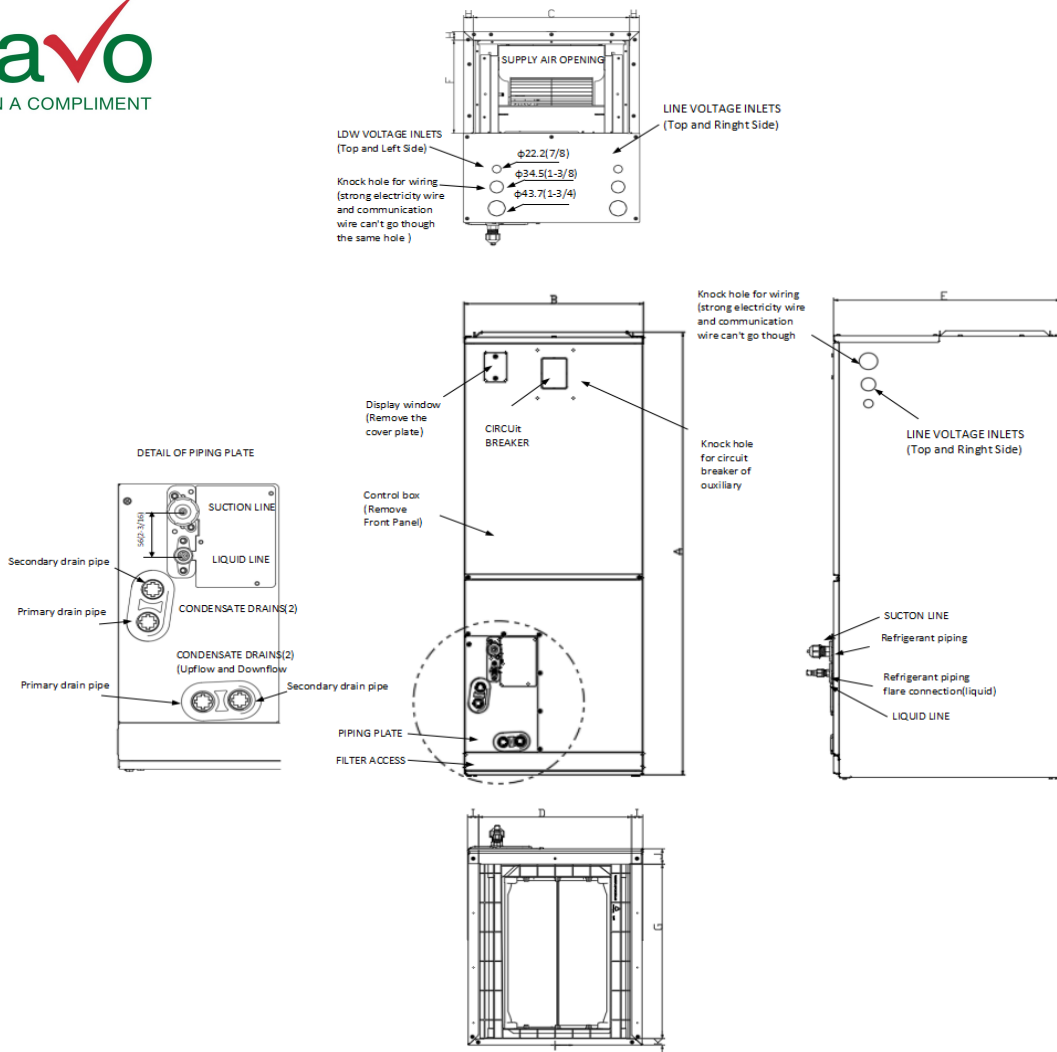


Dimensions		Model	18K/24K		30K/36K		48K/60K	
			inch	mm	inch	mm	inch	mm
A	Model Height		45-3/4	1162	49-49/64	1264	53-47/64	1365
B	Model width		17-41/64	448	21-9/64	537	24-39/64	625
C	Supply Air Opening width		15-5/8	397	19-9/64	486	22-19/32	574
D	Return Air Opening Width		15-25/64	391	18-47/64	476	22-23/64	568
E	Model Depth		21-7/64	536	21-7/64	536	21-7/64	536
F	Supply Air Opening Depth		10-9/32	261	10-9/32	261	10-9/32	261
G	Return Air Opening Depth		18-23/32	475.5	18-23/32	475.5	18-23/32	475.5
H	Supply Air Opening Clearance		15/16	24	15/16	24	15/16	24
I	Return Air Opening Side Clearance		1-1/8	28.5	1-1/8	28.5	1-1/8	28.5
J	Return Air Opening Front Clearance		1-21/32	42	1-21/32	42	1-21/32	42
K	Return Air Opening Back Clearance		45/64	18	45/64	18	45/64	18

Outdoor Unit Dimension

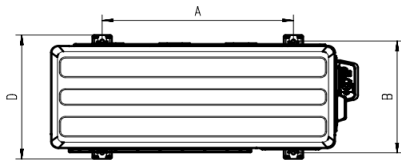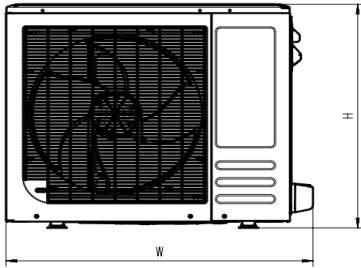


Dimensions		Model		18K/24K		30K/36K/48K/60K	
		inch	mm	inch	mm		
W	Model width	915	36-1/32	965	37-63/64		
H	Model height	650	25-19/32	810	31-57/64		
A	Distance between left and right foot bolts	605	23-13/16	635	25		
B	Distance between front and rear foot bolts	357	14-1/16	405	15-15/16		
D	Model depth	392	15-7/16	448	17-41/64		

Installation Instruction For Outdoor Unit

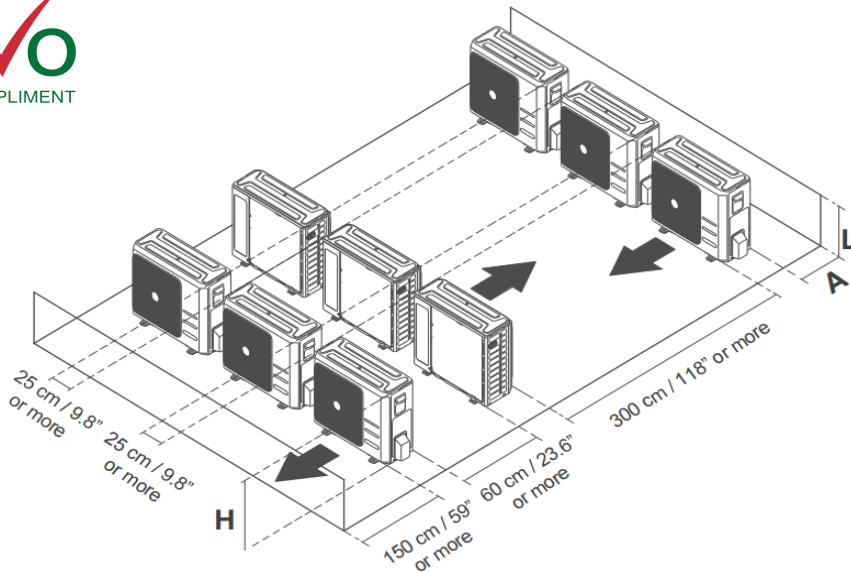

Fan Performance For Indoor Unit

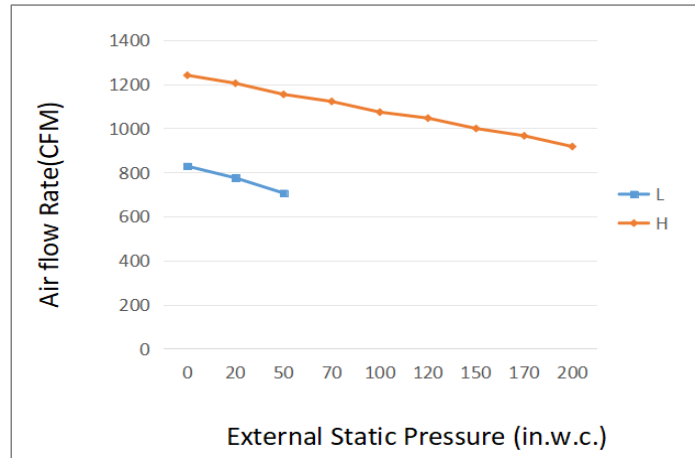

Features

- High efficiency and energy-saving, SEER2 up to 18.4
- Multi-position installation: horizontal(left or right), vertical(up or down)
- ECM fan motor with constant torque technology
- External static pressure up to 0.80 In.W.G
- 1 inch R4.2 fiberglass free insulation reduces condensation and boosts efficiency(optional)
- Optional Auxiliary heat kit up to 20kW
- Easy Maintenance
- Multiple control options available:
 - Wired controller with built-in WiFi
 - Third-Party 24V Thermostat
- Adaptive Control System
- Crankcase heater equipped as standard